

SRP-S320 Compact Loudspeaker (pair)

- The ABS moulded plastic cabinet of the SRP-S320 is designed to be inconspicuous and yet faithfully reproduce a remarkably wide range of frequencies with a high SPL. Compact and lightweight, the SRP-S320 is suitable for use in hotel foyers and boardrooms, or anywhere where a discreet yet effective audio system is required. The SRP-S320 is also available in white (S320W), or in 100V (S320T) and weatherproof versions (S31P).

- Supplied as a pair
- Can be mounted horizontally or vertically
- Compact bass reflex enclosure with twin ducts
- 12cm driver
- 50W rms. power handling
- UV stable moulded ABS plastic cabinet

SPECIFICATIONS:

Input: Push Terminal

Speaker System:

12cm driver in bass reflex enclosure

Rated Input Power: 50W

Max input power: 150W

Sensitivity: 89dB/W/m

Impedance: 8Ω

Frequency Response: 85Hz - 18kHz

Directivity (H x V): 100° x 100°

Max SPL: 106dB / m (rated power)

Mounting: 2 x M5 thread @ 60mm spacing

Mass: 2.0kg

Dimensions: 220(W) x 144(H) x 160(D) mm




SUPPLIED ACCESSORIES


N/A

OPTIONAL ACCESSORIES

MU-533M Wall / Ceiling bracket



CHARACTERISTICS

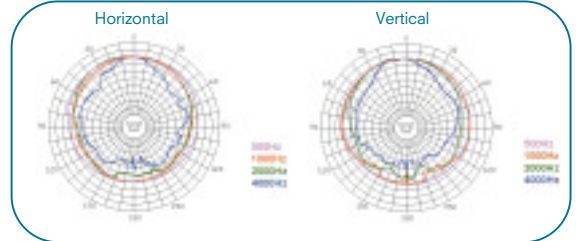

SRP-S420 Loudspeaker (pair)

- Designed specifically for the efficient reproduction of speech, the SRP-S420 is a compact loudspeaker which can be placed alongside CRT monitors, due to its magnetic shielding. The unit features wide horizontal & vertical dispersion patterns for maximum coverage from a single loudspeaker.

- Supplied as a pair
- Magnetically shielded for A/V use
- Two-way bass reflex enclosure
- 16 cm cone woofer & 8 cm cone tweeter
- 60W rms. power handling
- Can be mounted horizontally or vertically
- Tweeter protection circuit
- Optimised for vocal reproduction
- Punched metal speaker grille

SPECIFICATIONS:

OFC Litz Cable

Input: Push Terminal

Speaker System:

16 cm LF & 8cm HF in bass reflex enclosure

Rated Input Power: 60 W

Maximum Input Power: 180 W

Impedance: 8 Ω

Sensitivity: 91dB / W / m

Frequency Response: 70Hz - 20kHz

Directivity (H x V): 90° x 90°

Max SPL: 109 dB / m (rated power)

Mounting: 2 x M5 thread @ 60mm spacing

Mass: 4.5 kg

Dimensions: 195(W) x 320(H) x 230(D) mm



SUPPLIED ACCESSORIES

N/A

OPTIONAL ACCESSORIES

MU-533M Wall / Ceiling bracket

