



HQView420

HQV™ Scaler–Switcher with Warp and Edge Blend



Harnessing the power of the Reon™ video processor from IDT, running state of the art HQV algorithms with expertly designed hardware and firmware from Calibre, HQView420 is a highly flexible image scaler which provides stunning image quality for professional, broadcast and corporate AV users.


HQView420 includes 4-sided soft edge blend for seamless blending of multiple projectors and includes flexible geometry correction functions able to correct image shape and projector misalignment by dragging and dropping each image corner, or by pin, barrel, rotation or by keystone and rotation.

Full warp mapping is also supported by HQView420. A flexible and intuitive PC application is included for easy warp map creation, or third-party generated warp maps can also be processed from automatic image alignment systems making HQView420 ideal for dual overlaid projector alignment in 3D projection systems.

- Best in class professional image processing in a compact affordable 1U format
 - Use as a routing switcher and universal interface for DVI or HDMI switching and distribution systems, projectors and displays
 - Improve video image quality with better detail and clarity
 - Superior de-interlacing reduces image flicker and artefacts
 - Remove picture noise from poor quality video sources
 - Powerful geometry correction for off-axis projection, pin/barrel and image rotation
 - 4-Sided soft edge blend for tiling multiple projectors to produce large images
 - Flexible warp mapping for curved screen projection, simulation 3D alignment
-
- HDMI, DVI, VGA Analog, Component YPbPr, RGBS/RGsb, Composite, S-Video & HD-SDI inputs with signal compatibility up to 1080p & WUXGA
 - HDMI/DVI & VGA Analog outputs
 - Motion adaptive per pixel video de-interlacing, HD & SD
 - Multi-directional diagonal de-interlace filter
 - Automatic 3:2 & 2:2 pull-down detection with automatic film, video and video over film detection
 - Chroma and Luma transient improvement
 - Edge anti-aliasing
 - 4-field full resolution SD & HD processing
 - 4D Motion, Noise Adaptive HQV noise reduction for spatial and temporal noise
 - Codec noise reduction for mosquito and block compression noise
 - Direct input selection keys allow input selection without using menu system
 - Flexible color calibration controls
 - Gamma controls
 - 10-bit signal inputs, 12-bit accurate internal processing
 - Selectable processing versus latency: best picture and low latency modes
 - Latency as low as 0.25-frame progressive inputs, 1.25-frames interlaced inputs
 - USB port for in-field firmware updates
 - Programmable customer logo on menu
 - TCP/IP remote control and Web Server
 - Easy to navigate self-explanatory OSD menus
 - Powerful geometry correction capabilities
 - Image rotation, pin/barrel correction
 - 4-Sided soft edge blend
 - Flexible warp mapping

Calibre UK Ltd,
Cornwall House, Cornwall Terrace,
Bradford, West Yorkshire
BD8 7JS, England

T. +44 (0)1274 394125
F. +44 (0)1274 730960
E. proavsales@calibreuk.com
W. www.calibreuk.com

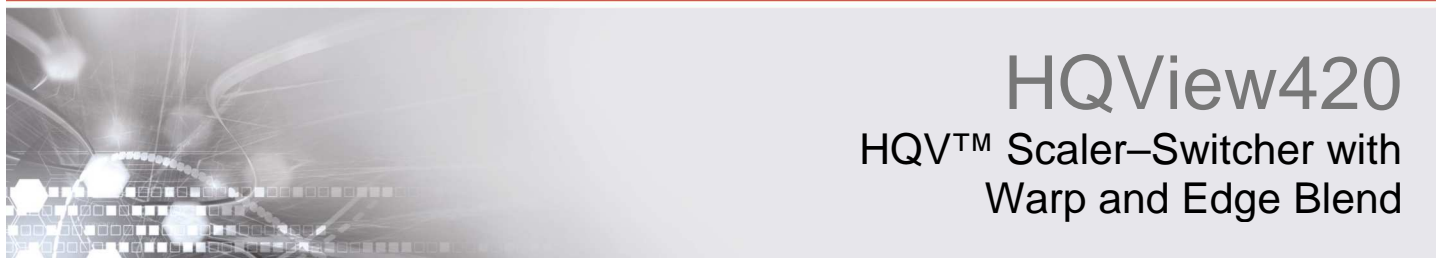

HQView420

HQV™ Scaler–Switcher with Warp and Edge Blend

Inputs

2x Composite Video CVBS (NTSC, PAL & SECAM),
1x via BNC jack and 1x via Cinch/RCA
1x YC/S-Video via 4 pin mini DIN
1x Component analog video YPbPr(S) or
RGsB/RGBS via 3 or 4 x BNC jack
1x HDMI1.3 with HDCP, 8/10/12 bit video compatible 10-bit
internal processing depth. Audio strip-off of SPDIF compatible
formats
1x DVI with HDCP
1x SVGA Analog via 15HDD
1x HD-SDI, accepts SD and HD SDI signals via BNC

Supported video formats:

HD 720p, 1080i, 1080psf (psf digital only)
1080p23.97/24/30, 1080p30, 1080p50, 1080p59.94, 1080p60
ED 480p, 576p (not via SDI)
SD625i (576i), 525i (480i)
Common VESA graphics formats from 640x480 to 1920x1200
(with reduced blanking for 1920x1200 and 1600x1200 modes)

Multi standard support for CVBS & YC in PAL, NTSC, SECAM
formats with selectable 3D comb for composite

Outputs

1x DVI/HDMI with HDCP
(HDMI1.3 with deep color 8/10/12 bit support, via DVI connector)
1x VGA Analog via 15HDD
1x S/PDIF digital audio via RCA
NB: VGA Analog output is disabled with HDCP-encrypted input

Supported Output formats:

Common VESA formats from 640x480 to 1920x1200, 720p, 1080p
Selectable I/O lock mode, or frame rate conversion mode
Selectable aspect ratio conversion

User Controls

Remote control via RS232, TCP/IP API and Web Server.
PC-based Warp Map Generator tool
Keypad for direct input selection and control of common adjustments as well
as OSD menu access
USB port for uploading software updates and new features

Power Requirements

100-264VAC, 30W typical

Warranty

1-year return to base warranty covers parts and labor, shipping excluded.

Note: PIP and edge blend are mutually exclusive so cannot be used simultaneously

HQView model >	100S	200S	210	300S	310	320	400S	410	420	500S	510	520
DVI/HDMI Inputs				X	X	X	X	X	X	X	X	X
Component Input				X	X	X	X	X	X	X	X	X
Composite/S-Video Inputs	X						X	X	X	X	X	X
VGA Analog Input				X	X	X	X	X	X	X	X	X
HD-SDI Input							X	X	X			
3G-SDI Input		X	X							X	X	X
DVI/HDMI Output	X	X	X	X	X	X	X	X	X	X	X	X
VGA Analog Output							X	X	X	X	X	X
3G-SDI Output										X	X	X
3G-SDI Audio embed/de-embed										X	X	X
HQV Processing	X	X	X	X	X	X	X	X	X	X	X	X
PIP/POP/PAP							X	X	X	X	X	X
TCP/IP Control	X	X	X	X	X	X	X	X	X	X	X	X
Low Latency Mode	X	X	X	X	X	X	X	X	X	X	X	X
Flicker Filter for Interlaced Output Modes										X	X	X
Geometry Correction, 4-Corner, Rotate			X		X	X		X	X		X	X
Genlock										X	X	X
Pan, Zoom, Tilt	X	X	X	X	X	X	X	X	X	X	X	X
Edge Blending					X	X		X	X		X	X
Auto pan/zoom/tilt of content for blending					X	X		X	X		X	X
Warp Mapping						X			X			X



Calibre UK Ltd,
Cornwall House, Cornwall Terrace,
Bradford, West Yorkshire
BD8 7JS, England

T. +44 (0)1274 394125
F. +44 (0)1274 730960
E. proavsales@calibreuk.com
W. www.calibreuk.com